
GHS 15

GLASS MANIPULATORS

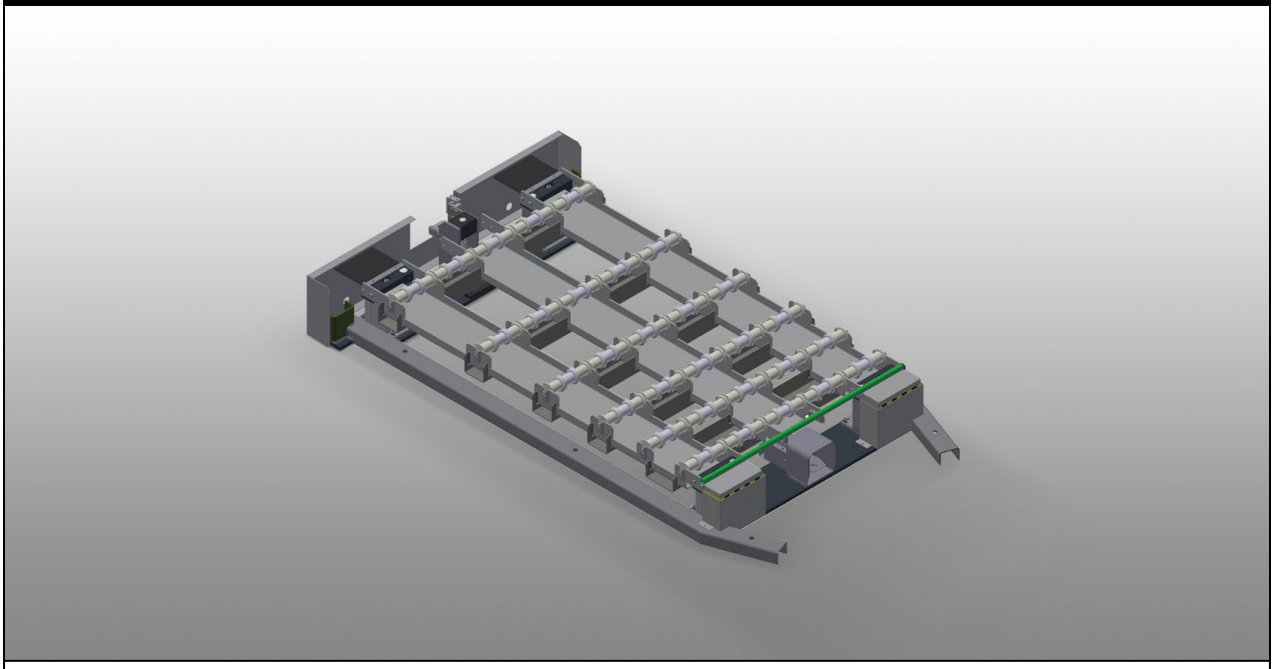


Easy handling of sheets of glass in combination with glass transport trolley GFW 15. With a pneumatic lifting unit controlled with a foot valve, max. travel = 50 mm. Lower roller conveyors equipped with 15 x 4 PVC rollers in total. Complete with draw-in mechanism for glass transport trolley GFW 15. Basic dimensions: 2.100 x 1.250 mm.

elumatec AG
Pinacher Straße, 61
75417 Mühlacker
Germany


Tel +49 7041-14-184
sales@elumatec.com
www.elumatec.com

The right to make technical alterations is reserved.

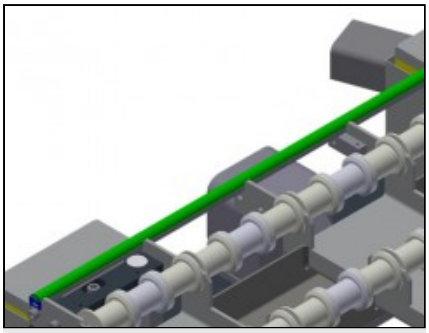

Supports

Lower supporting surfaces with lifting rollers for easier loading and unloading

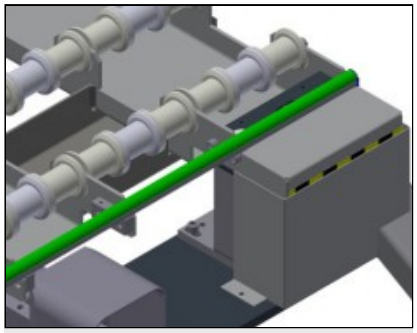

Lifting unit

Lifting unit for transferring sheets of glass to glass transport trolley GFW 15, controlled with a foot valve, max. travel = 50 mm

elumatec AG
Pinacher Straße, 61
75417 Mühlacker
Germany

Tel +49 7041-14-184
sales@elumatec.com
www.elumatec.com

The right to make technical alterations is reserved.

GHS 15 / GLASS MANIPULATORS

CHARACTERISTICS

Length (mm)	2.100
Width (mm)	1.250
Height (mm)	250
Maximum travel (mm)	50
Weight (kg)	100

Included ● Available ○

elumatec AG
Pinacher Straße, 61
75417 Mühlacker
Germany

Tel +49 7041-14-184
sales@elumatec.com
www.elumatec.com

The right to make technical alterations is reserved.