




## **GHS15**

Glass  
compartment/glazing  
bead trolleys

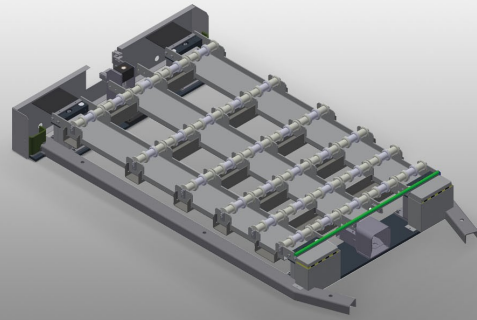


Easy handling of sheets of glass in combination with glass transport trolley GFW 15. With a pneumatic lifting unit controlled with a foot valve, max. travel = 50 mm. Lower roller conveyors equipped with 15 x 4 PVC rollers in total. Complete with draw-in mechanism for glass transport trolley GFW 15. Basic dimensions: 2.100 x 1.250 mm.



**Supports**

Lower supporting surfaces with lifting rollers for easier loading and unloading

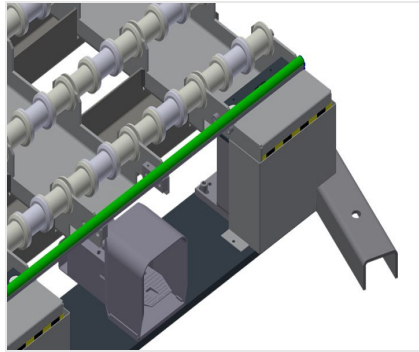

**Lifting unit**

Lifting unit for transferring sheets of glass to glass transport trolley GFW 15, controlled with a foot valve, max. travel = 50 mm





**GHS 15 / GLASS COMPARTMENT/GLAZING BEAD TROLLEYS**

**CHARACTERISTICS**

Length (mm)	<input type="radio"/>
Width (mm)	<input type="radio"/>
Height (mm)	<input type="radio"/>
Maximum travel (mm)	<input type="radio"/>
Weight (kg)	<input type="radio"/>

Included ● Available ○