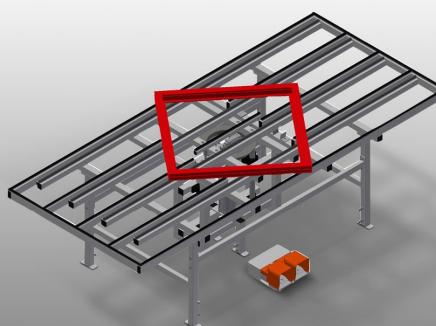




HD3000

Lift and turn tables

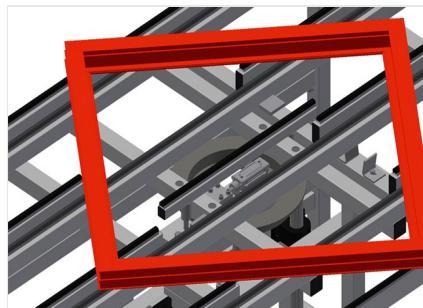


Lift and turn table for assembly and gasket insertion


- Stable steel construction
- Ideal for assembly and gasket insertion
- Adjustable height
- Inner table height pneumatically adjustable
- Inner table can be rotated; with pneumatic fixing brake
- Inner table equipped with rubber strips
- Outer table with plastic slide bars
- 4-fold compressed air supply

Option


- Outer table also available with rubber profiles on request (for aluminium profiles)

**Lift and turn table HD 3000****Lift and turn mechanism**

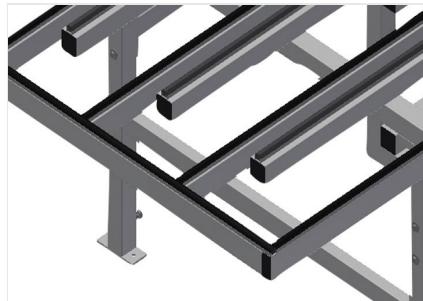
Practical for hardware assembly as well as for final assembly and gasket insertion. Inner table height pneumatically adjustable. Inner table can be rotated; with pneumatic fixing brake

**Foot switch**

Control via foot valve

**4-fold compressed air connection**

4-fold compressed air connection for connecting compressed-air tools

**Supporting surfaces**

Outer table with plastic slide bars. Inner table equipped with rubber strips.

**Outer table with rubber strips**

Outer table rubber-knob profile for HD 3000. Outer table also available with rubber strips on request.

HD 3000 / LIFT AND TURN TABLES

- Length 3,000 mm
- Weight 240 kg
- Width 1,300 mm
- Load 200 kg
- Adjustable height 850 – 1,000 mm
- Compressed air supply 7 bar
- Travel of pneum. inner table 150 mm
- Air consumption approx. 35 l/min.

elumatec AG
Pinacher Straße, 61
75417 Mühlacker
Germany

Tel +49 7041-14-184
sales@elumatec.com
www.elumatec.com

The right to make technical alterations is reserved.