




*HD*

Lift and turn tables

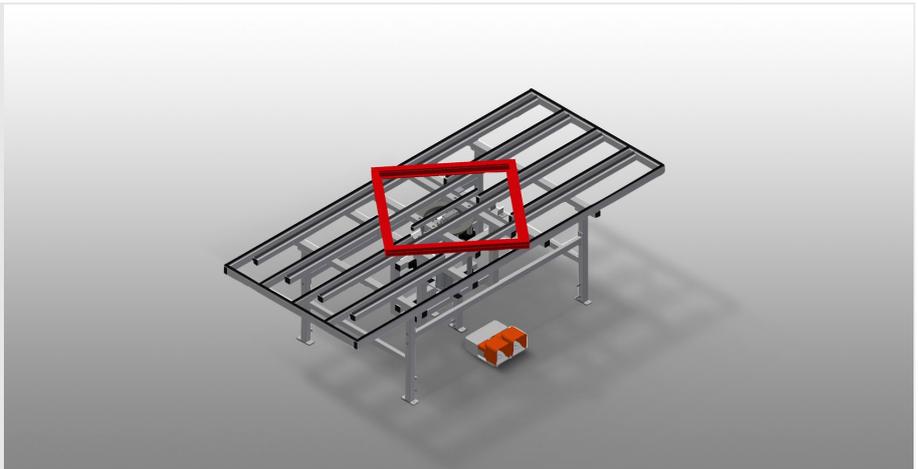


Lift and turn table for assembly and gasket insertion. Stable steel construction. Ideal for assembly and gasket insertion. Adjustable height. Inner table height pneumatically adjustable. Inner table can be rotated; with pneumatic fixing brake. Inner table equipped with rubber strips. Outer table with plastic slide bars. 4-fold compressed air supply.






### Lift and turn mechanism

Practical for hardware assembly as well as for final assembly and gasket insertion. Inner table height pneumatically adjustable. Inner table can be rotated; with pneumatic fixing brake

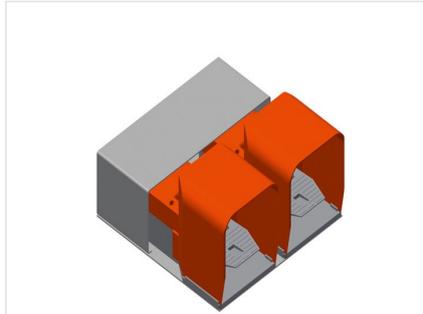

### Foot switch

Control via foot valve

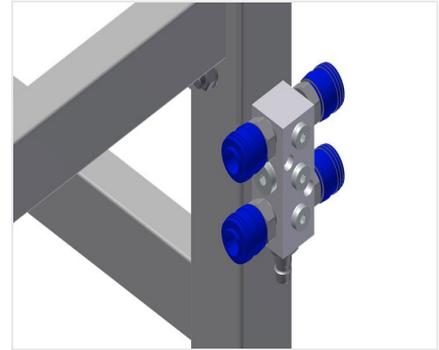

### 4-fold compressed air connection

4-fold compressed air connection for connecting compressed-air tools



### Supporting surfaces

Outer table with plastic slide bars. Inner table equipped with rubber strips.



### Outer table with rubber strips

Outer table rubber-knob profile for HD 3000. Outer table also available with rubber strips on request.





### HD / LIFT AND TURN TABLES

#### MODELS

HD 3000



#### DIMENSION AND WEIGHT

Length (mm)	3.000
Width (mm)	1.300
Weight (kg)	240

#### SUPPORTING SURFACE

Adjustable height (mm)	850 ÷ 1000
Travel of pneumatic inner table (mm)	150
Load capacity (kg)	200
Outer table surface with rubber strips	<input type="radio"/>

#### CHARACTERISTICS

Operating air pressure (bar)	7
Air consumption approx. (l/min)	35

Included ● Available ○