

## HT1000

Horizontal assembly  
tables



Horizontal table for all work tasks on frames and sashes


- Stable steel construction
- Table supporting surface with plastic slide bars
- Storage tray for setting down tools and accessories
- Adjustable height
- Simple installation with a modular system design

### Options

- Also available with brush strips on request
- Also available with felt strips on request (for wooden elements)
- Also available with rubber strips on request (for aluminium elements)
- Roller support
- Tool rack
- 4-fold compressed air supply



**Horizontal table -  
Individual table HT 1000**

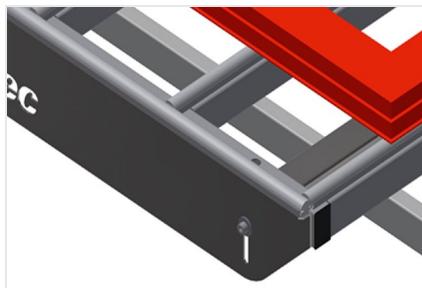

**Supporting surfaces**

Supporting surfaces with plastic slide bars



**Storage tray**

Storage tray for setting down tools and accessories



**Height adjustment**

Adjustable height, working height can be set to 850 - 1,000 mm by means of adjustable feet



**Brush strip**

Supporting surfaces with brush strip




**Felt strip**

Supporting surfaces with felt profile strip




### Rubber strips

Supporting surfaces with rubber-knob profile for aluminium elements

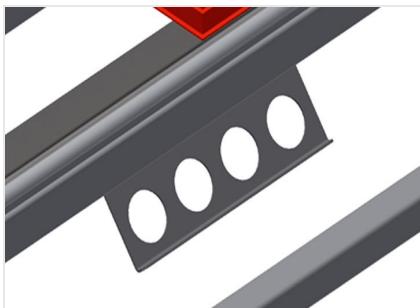


### Tool rack

Tool rack for pneumatic or electrical tools

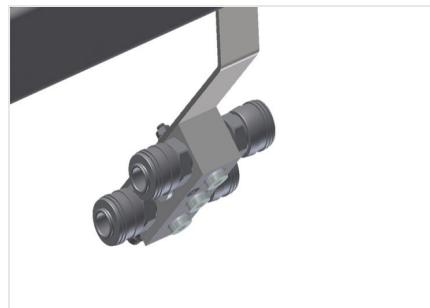


### 4-fold compressed air connection

4-fold compressed air connection for connecting compressed-air tools

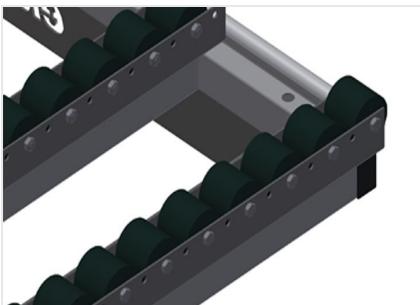


### Roller support, cpl., for HT 1000/PVC

Hard plastic rollers with polyamide coating, on plain bearings, load per roller: 60 kg, convenient for transport and handling of PVC elements

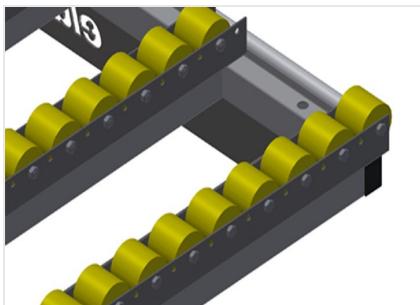

### Rubber roller support, cpl., for HT 1000/Alum.

Plastic rollers with polyurethane coating, on ball bearings, load per roller: 40 kg, convenient for transport and handling of aluminium elements

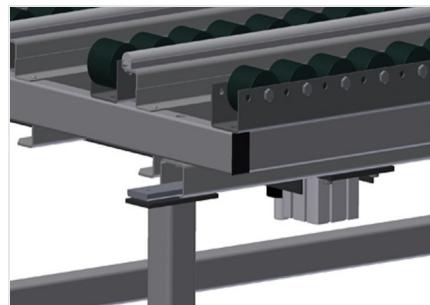

### Pneumatic lifting unit

Lifting unit L = 1,000 mm

**HT 1000 / HORIZONTAL ASSEMBLY TABLES**

- Length 1,000 mm
- Width 1,300 mm
- Height 850 – 1,000 mm
- Weight 70 kg



**elumatec AG**  
Pinacher Straße, 61  
75417 Mühlacker  
Germany

Tel +49 7041-14-184  
[sales@elumatec.com](mailto:sales@elumatec.com)  
[www.elumatec.com](http://www.elumatec.com)

The right to make technical alterations is reserved.