


HT2045 L

Horizontal assembly
tables

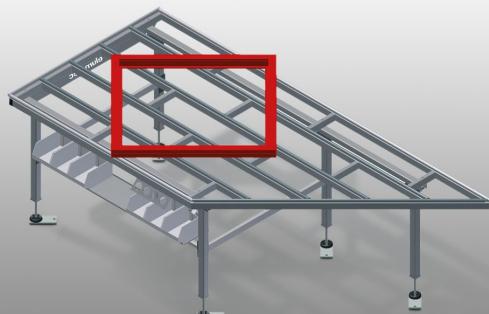

Horizontal table for all work tasks on frames and sashes

- Stable steel construction
- Angled work table; can be used as a pass-through in the production line or as a buffer zone
- Assembly table for all work tasks on frames and sashes
- Table supporting surface with plastic slide bars
- Storage tray for setting down tools and accessories
- Adjustable height
- Simple installation with a modular system design

Options

- Also available with brush strips on request
- Also available with felt strips on request (for wooden elements)
- Also available with rubber strips on request (for aluminium elements)
- Roller support
- Tool rack
- 4-fold compressed air supply
- Storage area with six plastic trays
- Parallelogram support, cpl., for 90°
- Triangular support, cpl., for in-line use

HORIZONTAL TABLE - RIGHT TABLE, 45° HT 2045 R


See Left table, 45° HT 2045 L



Horizontal table - Right table, 45° HT 2045




Horizontal table - Left table, 45° HT 2045

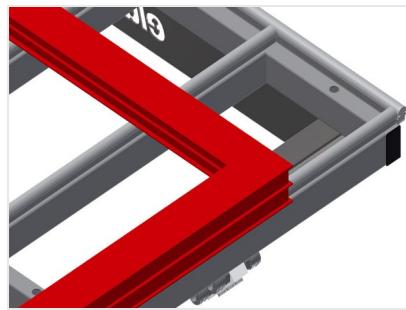

Supporting surfaces

Supporting surfaces with plastic slide bars

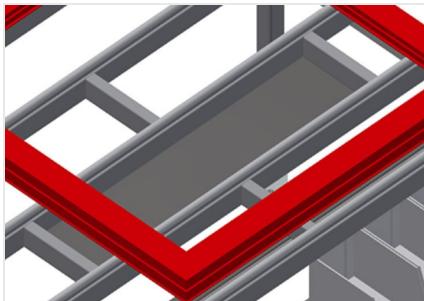


Storage tray

Storage tray for setting down tools and accessories



Height adjustment

Adjustable height, working height can be set to 850 - 1,000 mm by means of adjustable feet

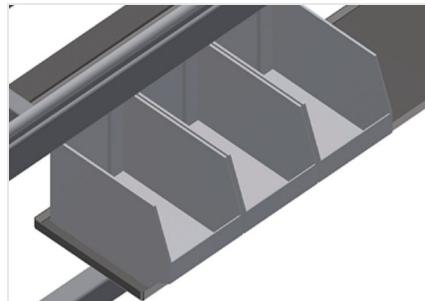

Storage area

Storage area with six plastic trays for small accessories, hardware and screws

**Brush strip**


Supporting surfaces with brush strip

**Felt strip**

Supporting surfaces with felt profile strip

**Rubber strips**


Supporting surfaces with rubber-knob profile for aluminium elements

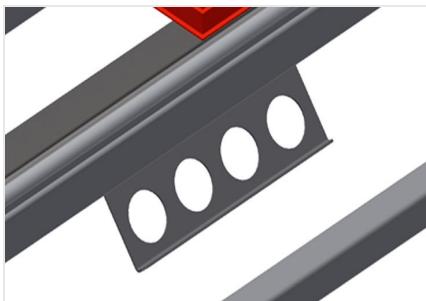**Tool rack**


Tool rack for pneumatic or electrical tools

**4-fold compressed air connection**

4-fold compressed air connection for connecting compressed-air tools

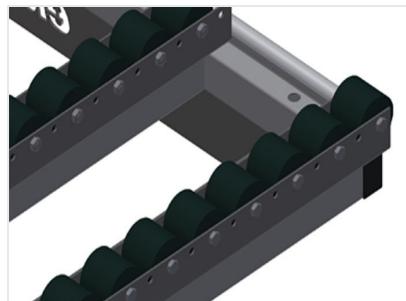**Roller support, cpl., for HT 2045/PVC**


Hard plastic rollers with polyamide coating, on plain bearings, load per roller: 60 kg, convenient for transport and handling of PVC elements

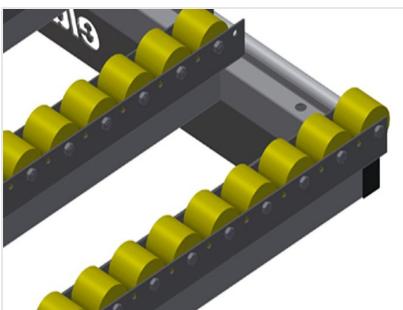**Roller support, cmpl., for HT 2045/Alum.**

Plastic rollers with polyurethane coating, on ball bearings, load per roller: 40 kg, convenient for transport and handling of aluminium elements

**Parallelogram support, cmpl., for 90°**

Table supporting surface brush strip, Table supporting surface felt profile strip, Table supporting surface rubber-knob profile, Roller support, cmpl. for PVC, Rubber roller support cmpl. for Alum.

**Triangle support, cmpl., for in-line use**

Supporting surface brush strip, Supporting surface felt profilestrip, Supporting surface rubber-knob profile, Roller support, cmpl. for PVC, Rubber roller support cmpl. for Alum.

HT 2045 L / HORIZONTAL ASSEMBLY TABLES

- Length 2,850 mm
- Height 850 – 1,000 mm
- Width 1,300 mm
- Weight 100 kg



elumatec AG
Pinacher Straße, 61
75417 Mühlacker
Germany

Tel +49 7041-14-184
sales@elumatec.com
www.elumatec.com

The right to make technical alterations is reserved.