

KTH4000

Tilting tables



Assembly table for vertical and horizontal assembly


- Stable steel construction
- Important when switching from vertical to horizontal transportation and vice versa
- Ideal for vertical and horizontal assembly
- Infinitely variable intermediate positions for ergonomic working
- Pneumatic tilting
- Pneumatic vertical height adjustment
- Table supporting surface with plastic slide bars
- Roller support can be lowered pneumatically
- Two lateral pneumatic clamps, (lowerable)
- 4-fold compressed air supply

Options

- Also available with brush strips on request
- Also available with felt strips on request (for wooden profiles)
- Also available with rubber strips on request (for aluminium profiles)
- Pull-out table supporting surface at top for KT/KTH 4000
- Profile protectors for support rollers
- Additional clamps for KT/KTH 4000
- Mobility unit for KT/KTH/MS/VE
- Rail, 2.0 m




Tilting table with height adjustment KTH 4000

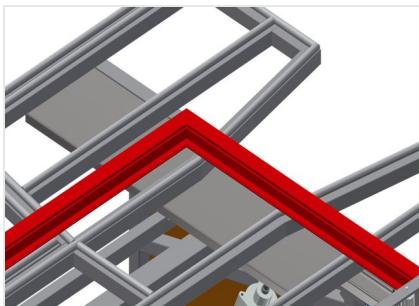


Supporting surfaces

Supporting surfaces with plastic slide bars

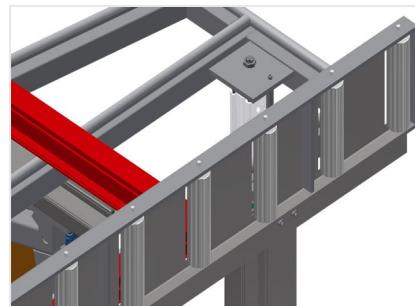


Roller support

Roller conveyor can be lowered pneumatically to allow unhindered working in horizontal position; in vertical position, trouble-free onward transport is possible

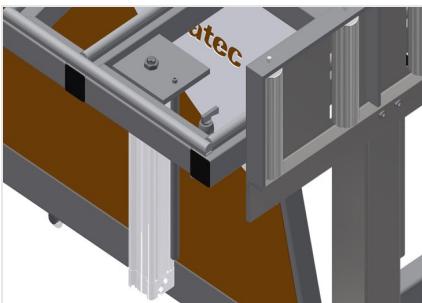


Clamps

Two clamps at the side for fixing the window element in place. Laterally adjustable with hand lever valve. Max. profile clamping height 150 mm



Foot switch

Control via foot valve, Pneumatic horizontal/vertical tilting; height adjustable pneumatically by 500 mm in the vertical position

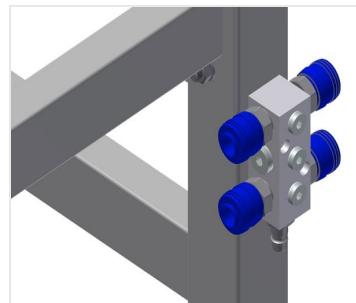


4-fold compressed air connection


4-fold compressed air connection for connecting compressed-air tools

**Auxiliary clamps**

Auxiliary clamps for KTH 3000 and KTH 4000. Auxiliary clamps provide extra security when working

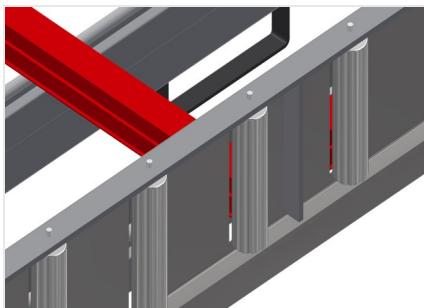**Profile protectors for support rollers**

Profile protectors for support rollers 200 mm (Alum./16 x and Alum./21 x). Roller conveyor with protective tubing over the rollers to protect the window element during infeed and outfeed

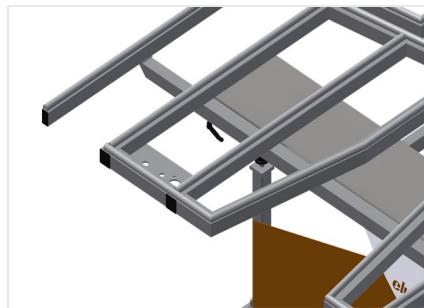**Pull-out profile support**


Pull-out table support at top for KTH 3000 and KTH 4000. The table support can be pulled out 500 mm at the top for high frames

**Brush strip**

Supporting surfaces with brush strip


**Felt strip**

Supporting surfaces with felt profile strip

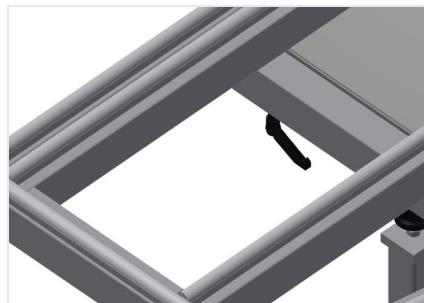**Rubber strips**

Supporting surfaces with rubber-knob profile

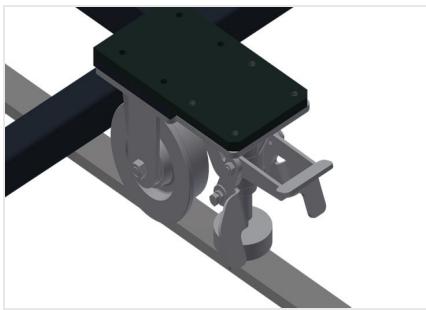

**Mobility unit**

Mobility unit for KT/KTH/MS/VE. Mobility unit with flanged rollers and fixing brake

**Rails**

Rails, 2.0 m, left and right

KTH 4000 / TILTING TABLES

- Length 4,000 mm
- Width 1,820 mm
- Vertical height 1,900 mm
- Pneum. height adjustment 500 mm
- Roller conveyor width 200 mm
- Weight 380 kg
- Load 200 kg
- Compressed air supply 7 bar
- Air consumption approx. 35 l/min.