



### KW2

#### Commissioning trolleys




Commissioning trolley for in-house and truck transportation of window elements

- Stable steel construction
- Trolley for in-house and external transportation
- Openings for forklift transportation
- Four loops for crane transportation
- Four lashing strap attachment points
- Profile supports with rubber surface
- Castors can be removed for increased stability of the commissioning trolley in a lorry
- Four castors, two of which have a fixing brake



**Commissioning trolley  
KW 2**

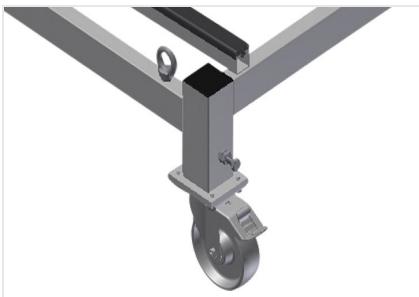


**Casters**

Four casters, two of which have a fixing brake, provide a high degree of mobility and easy, safe handling



**Removable casters**

Casters can be removed for increased stability of the commissioning trolley in a lorry

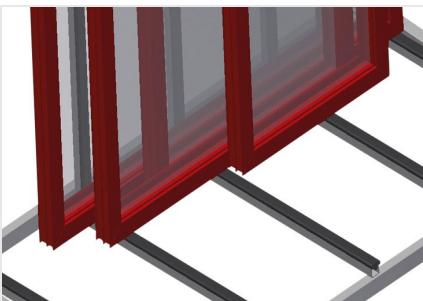


**Supports with rubber  
strip**

Supporting surfaces equipped with rubber strips to protect profiles from damage



**Forklift openings and  
lashing strap attachment  
points**

Equipped with four forklift openings and four lashing strap attachment points



**Crane attachment points**

Equipped with four crane attachment points

## KW 2 / COMMISSIONING TROLLEYS

- Length 2,025 mm
- Width 1,090 mm
- Height 1,880 mm
- Unit height 1,500 mm
- Effective width 800 mm
- Weight 130 kg
- Load 600 kg
- Roller diameter 125 mm

elumatec AG  
Pinacher Straße, 61  
75417 Mühlacker  
Germany

Tel +49 7041-14-184  
[sales@elumatec.com](mailto:sales@elumatec.com)  
[www.elumatec.com](http://www.elumatec.com)

The right to make technical alterations is reserved.