




### MG573

#### Mitre saws

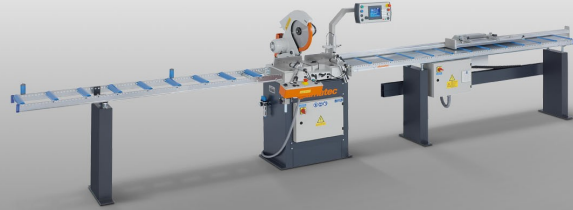

- Versatile for use with aluminium and PVC profiles
- Stable, ground, continuous support table with turn table on precision bearings
- Wear-resistant and quiet multi-V belt drive
- Equipped with saw blade as standard
- Hydro-pneumatic saw feed
- 2-hand operation
- Machine with base
- Pneumatic profile clamping (2x horizontal, 1x vertical)
- Pulsed coolant system

#### Options

- Extraction system
- Length stop and measuring systems
- Roller conveyors
- Saw blades
- High performance cutting fluid



**Mitre saw MGS 73/33**



**Mitre saw MGS 73/33**



**Mitre saw MGS 73/33**



**Mitre saw MGS 73/33**



**Mitre saw MGS 73/33**

Cutting diagram MGS 73/33





### MGS 73 / MITRE SAWS

---

- **MGS 73/33**
- Pivoting range from 0° - 45°, continuously adjustable to the left and to the right
- Positive location points at 15°, 30°, and 45°
- Saw blade diameter 380 mm
- Saw blade speed 2,800 rpm
- Power supply 230/400 V, 3~, 50 Hz
- Power output 3 kW
- Compressed air supply 7 bar
- Length 850 mm, depth 900 mm, height 1,450 mm, weight 220 kg