



SBZ122/70 Plus

Machining centres



- Designed for economical and efficient machining of aluminium, PVC and thin-walled steel profiles
- All operations, such as routing, drilling and tapping, are performed while the profile bar is stationary to protect the profile surfaces
- Better machining results thanks to the intelligent control technology
- Fast positioning of the machining unit with up to 60 m/min thanks to dynamic servo drives
- Tapping without compensation chuck
- Automatic clamp recognition and clamp positioning
- Automatic tool changer with four tool tray positions (without tools)
- State-of-the-art 3-axis controller
- Ergonomic operation thanks to the advanced inclined bed
- The absolute rotary encoder system means no axis homing is required
- Automatic clamp recognition and positioning prevents collisions
- Power torque routing motor with enclosed speed control for short spindle start-up and braking times.
- Certified, drive-integrated safety functions
- Low power consumption thanks to the intelligent control technology
- DC link coupling in the axis drives for greater energy efficiency
- Uninterruptible power supply (UPS)
- Windows operating system
- 15.6" panel PC, i3 processor, USB ports and network connection
- Simple, stress-free program entry with eluCam on the operating panel, even during operation
- Remote online maintenance

Machine configuration

- Air-cooled 8 kW, S1 routing spindle
- Enclosure to protect the operator
- Four horizontal, pneumatic material clamping units
- A material stop on the left
- Tool holder HSK-F63
- Minimum-volume lubrication system
- High performance cutting fluid
- Hand-held operator terminal
- Depth gauge

Options

elumatec AG
Pinacher Straße, 61
75417 Mühlacker
Germany

Tel +49 7041-14-184
sales@elumatec.com
www.elumatec.com

The right to make technical alterations is reserved.



- Tools
- Tool holders
- Automatic tool changer for max. four standard tools
- Automatic tool changer for angle head
- HSK-F63 rotating angle head for two tools
- Green Line cooling unit for the control cabinet with reduced energy consumption
- Barcode scanner
- Protective enclosure can optionally completely enclose the machine on all sides
- Four clamps as standard. Can be equipped with up to eight clamps
- Material reference stop (right) for positioning workpieces with overlength machining
- Additional stop for overlength machining (left)
- Length measurement on both sides
- Double clamping and other accessories on request
- 18.5" panel PC, i5 processor
- 21.6" panel PC, i7 processor
- Note holder
- Sound insulation hood
- Swarf trays for swarf removal




Machining unit




Tool magazine

SBZ 122 models with a machining length of four meters are equipped with a stationary tool magazine with four positions as standard. Additional tool magazines can be installed as needed anywhere along the X-axis. (16 standard tools und two angle heads)

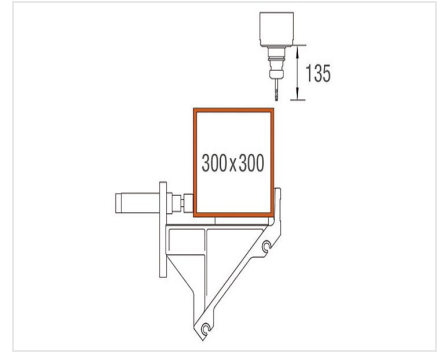


Machining area, Y and Z-axes

Profile machining from above

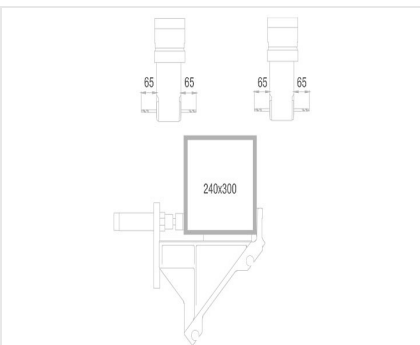

Machining area, Y and Z-axes

Profile machining from the front and from behind (optional)

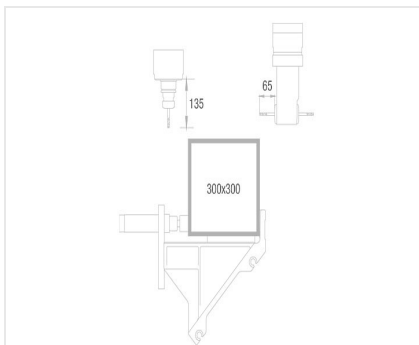

Machining area, Y and Z-axes

Profile machining from above and from behind (optional)





SBZ 122/70 PLUS / MACHINING CENTRES

SBZ 122/70 plus

| | |
|---|-------------------------------------|
| Max. machining length without profile end machining | 4,150 mm |
| Max. machining length with profile end machining | 4,000 mm (optional) |
| Traverse path X-axis | 4,295 mm, Vmax. 60 m/min. |
| Traverse path Y-axis | 910 mm, Vmax. 45 m/min. |
| Traverse path Z-axis | 475 mm, Vmax. 60 m/min. |
| Direction of machining | 1 (from above), (5 optional) |
| Positioning accuracy | +/- 0.1 mm |
| Routing spindle speed | max. 24,000 rpm |
| Routing spindle power | 8 kW, S1 with feedback (air-cooled) |
| Tool holder | HSK-F63 |
| Tool changing | automatic |
| Tool tray positions in the automatic magazine | 4 (max. 16) |
| Angle head | Optional |
| Disc milling cutter diameter | 100 mm |
| Saw blade diameter | - |
| Tool length (from extent of taper) | max. 150 mm |
| Clamp positioning | automatic |
| Clamps | Basic (with round guides) |
| Software | eluCам |
| Compressed air supply | > 7 bar |
| Power supply | 400 V, 3~, 50 Hz, 25 A |
| Air consumption per minute | approx. 185 l with spraying |
| Total length | 6,592 mm |
| Depth | 2,171 mm |
| Height | 3,000 mm |
| Weight | approx. 2,900 kg |