

24/11/2025

SBZ**155**

Machining centres



5-axis profile machining to meet the highest requirements, for the first time in a gantry design. The SBZ 155 profile machining centre is a new top-of-the-range elumatec model that combines previously unattained performance with a pioneering design. The faster, more compact and more flexible SBZ 155 raises the bar in automated CNC machining of aluminium and thin-walled steel profiles thanks to optional 6-sided machining, a compact gantry that reduces the footprint despite having one of the largest working ranges in its class.

Industrial and metal construction users benefit from the SBZ 155's short tool changing times that guarantee optimum machining cycles and enormous flexibility. The large on-board magazine can be equipped with 16 standard tools, and depending on the individual configuration, up to ten special tools (Seat for one 200mm and one 550 mm diameter saw blade, max. 4 angle heads). A gantry design and a machining area divided into two zones allow profiles with cross-sections of up to 1,000 x 380 mm to be picked up and passed through, as well as flexible working in shuttle mode. The SBZ 155 can be configured to suit the individual requirements of elumatec customers with a wide range of optional equipment: from automatic length measurement on both sides to a barcode scanner, every need can be met. And the all-rounder is eluCloud ready in order to meet the requirements of Industry 4.0.

1



24/11/2025



Process monitoring

The large, well laid-out machining area is clearly visible through a generously sized window.



Machining area with tool changer / dish changer

The tool magazine accommodates saw blades, routing and drilling tools, and additional machining units. The rotary tool changer at the top of the gantry reduces onboard changeover times, makes them safe to carry out in the on-board gantry, and also enables tool changes while the X-axis is moving.



Clamp insertion position with quick adjustment

The adaptive clamping technology offers locking positions for quick adjustment to different profile widths. The stop is positioned in a convenient place on the front.



Gantry design for machining large profiles

The arm is guided over the gantry at the front and back, allowing large-volume profiles of up to 1,000 x 380 mm to be machined. The SBZ 155 can handle a high machining volume and has the necessary stability to meet industrial requirements.



Lasers to protect the machining area

In shuttle operation, individual parts can be machined in two separate clamping zones, and a state-of-the-art safety system makes the machining areas easily accessible. The areas are divided into three zones, and the intelligent laser system – which is always active – reacts to protect the active zone. This ensures maximum safety and means fewer manual acknowledgements are required.


elumatec AG Pinacher Straße, 61 75417 Mühlacker Germany Tel +49 7041-14-184 sales@elumatec.com





SBZ 155 / MACHINING CENTRES

LAYOUT

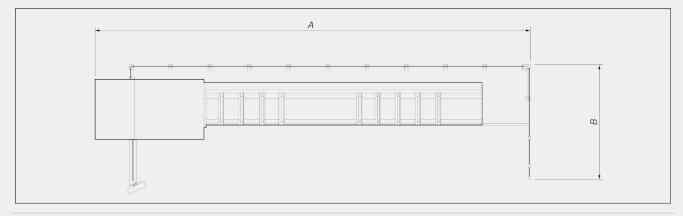

SBZ 155	8,1 m	11,7 m
Total length (A) (mm)	13.620	17.230
Depth (B) (mm)	4.510	4.510
Height (mm)	3.500	3.500
Weight (with 12 clamps) (kg)	~ 9.810	~ 11.705

The overall dimensions and the weight may vary depending on the product configuration

AXIS STROKES

X AXIS (mm)	8.100; 11.700
Y AXIS (mm)	1.150
Z AXIS (mm)	715
A AXIS	-2° /+95°
C AXIS	-275° / +95°

POSITIONING ACCU	RACY
------------------	------

X AXIS (mm)	+/- 0,1
Y AXIS (mm)	+/- 0,1
Z AXIS (mm)	+/- 0,1
A AXIS	+/- 0,1°
C AXIS	+/- 0,1°

elumatec AG Pinacher Straße, 61 75417 Mühlacker Germany Tel +49 7041-14-184 sales@elumatec.com www.elumatec.com



24/11/2025

POSITIONING SPEED	
X AXIS (m/min)	100
Y AXIS (m/min)	60
Z AXIS (m/min)	60
A AXIS (°/s)	84
C AXIS (°/s)	80

AXIS ACCELERATION	
X AXIS (m/s²)	2,0
Y AXIS (m/s²)	2,0
Z AXIS (m/s²)	4,0

ELECTROSPINDLE	
Maximum power in S1 (kW)	20
Maximum speed (rpm)	24.000
Maximum torque (Nm)	17,8
Toolholder cone	HSK 63F
Water cooling	•

OPERATING MODE	
Pendular mode with 2 lefthand materialstops	•
Cut and separation from the bar	•
Absolute encoder positioning	•
Tool length measurement and breakage control	0

SAFETY DEVICES AND PROTECTION	
Access protection frontside (Light curtain / laser)	•
Side access guard (fence / protective panel)	•
Protective device rear side (fence)	0

elumatec AG Pinacher Straße, 61 75417 Mühlacker Germany

Tel +49 7041-14-184 sales@elumatec.com www.elumatec.com




24/11/2025

MACHINING FACESWith direct tool (front/top/back, ends)3 + 2With angular head (bottom)1

WORK AREA

1F = 1 face machining 5F :




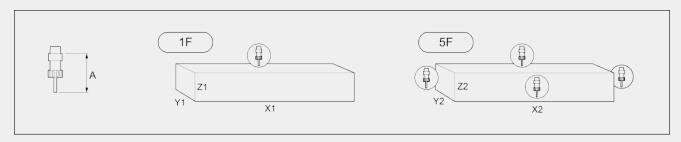

		A	X1	Y1	Z1	X2	Y2	Z 2
SBZ 155 - 8,1 m	single mode	135	7.789	1000	380	7.789	550	380
	double mode	135	2.850	1000	380	2.850	550	380
SBZ 155 - 11,7 m	single mode	135	11.340	1000	380	11.340	550	380
	double mode	135	4.620	1000	380	4.620	550	380

Dimensions in mm

IF = Bottom face machining

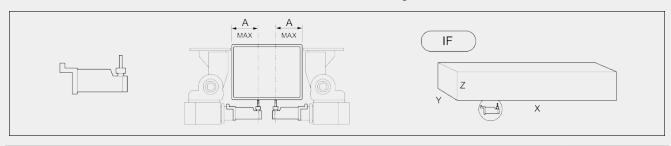

		A	X	Y	Z
SBZ 155 - 8,1 m	single mode	180	7.789	500	380
	double mode	180	2.850	500	380
SBZ 155 - 11,7 m	single mode	180	11.340	500	380
	double mode	180	4.620	500	380
Dimensions in mm					

elumatec AG Pinacher Straße, 61 75417 Mühlacker Germany Tel +49 7041-14-184 sales@elumatec.com www.elumatec.com





24/11/2025

AUTOMATIC TOOL MAGAZINE	
Tool magazine traveling along	•
Magazin Type: disc tool changer	•
Maximum number of magazine tools	26
Number of places standard tools up to D=63 mm max.	16
Number of places special tools	10
Number of places for special tools D=100 mm max. (optional)	4 - 8
Special tool 1: blade D=550 mm	0
Special tool 2: blade D=200 mm	0
Angle head	0
Maximum number of places for angle heads (optional)	4
Maximum disk cutter (mm) (optional) (instead of angular head 3/4)	250
Tool holder set HSK63 + collets	0
Maximum tool length (from taper) (mm)	250
Maximum tool weight with tool holder (kg)	10

WORKPIECE LOCKING	
Autonomous clamp positioning	•
8.100 mm versions; standard number of clamps (max. travel)	8
8.100 mm versions; max. number of additional clamps with max. travel	4
11.700 mm versions; standard number of clamps (max. travel)	10
11.700 mm versions; max. number of additional clamps with max. travel	2
Further clamps with limited travel capacity	0

SWARF AND WASTE CONVEYOR	
Chip conveyor integrated in machine bed	0
Shavings kink conveyor	0

SUCTION	
Fume extraction	0

elumatec AG Pinacher Straße, 61 75417 Mühlacker Germany Tel +49 7041-14-184 sales@elumatec.com www.elumatec.com





24/11/2025

PNEUMATIC CONNECTION	
Pressure (bar)	6 - 7
Max. air consumption (at 6 bar) (I/min)	500
Max. air consumption (at 7 bar) (I/min)	750

CONTROL UNIT	
Microsoft® Windows® 10 Embedded	•
Panel-PC 21,6" Processor i7	•
Hand control	•
USB ports and network connection	•
Barcode reader	0
Label printer	0
Online Assistance	•
USV for safe shutdown of the machine	•

SOFTWARE eluCam Modul

Included • Available \circ

elumatec AG Pinacher Straße, 61 75417 Mühlacker Germany

Tel +49 7041-14-184 sales@elumatec.com www.elumatec.com