


## VE3000

Inspection and glazing unit




Inspection and glazing unit for glazing and final inspection in individual and serial assembly line production

- Stable steel construction
- Quick and precise assembly of windows, doors and elements
- Precision ensured through parallel clamping bar pressing technique
- For glazing and functional checks
- For connecting frames and sashes
- Height continuously adjustable
- Two pressing bars which fold down and can be moved pneumatically
- Easy operation by means of foot switch
- 4-fold compressed air supply

### Options

- Lead-in rollers, cmpl., right
- Lead-in rollers, cmpl., left
- Profile protectors for support rollers
- Tilt adjustment of 0° – 8°

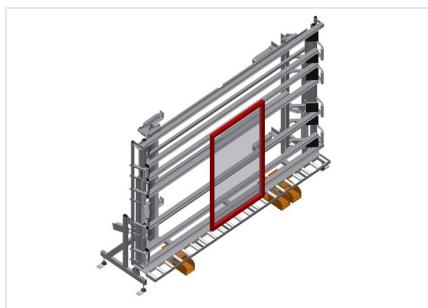


**Inspection and glazing unit VE 3000**




**Back support**

Rear back support with plastic slide bars

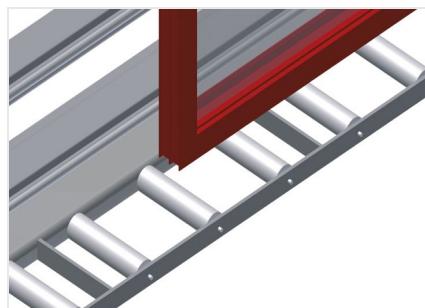


**Supports**

Lower roller conveyor with support rollers, L = 200 mm

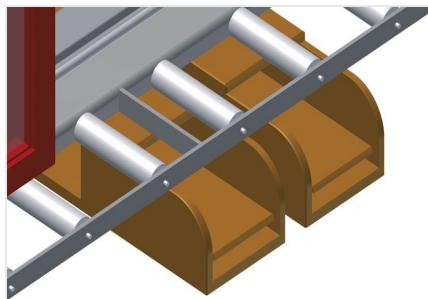

**Foot switch**

All functions are controlled via foot valves

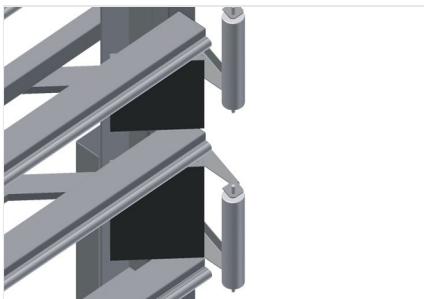

**Pressing bar**

Simultaneous, synchronous folding down and moving of the pressing bars ensure a minimum of time is required for opening and closing the press. Allows free pass-through of the window.




**Lead-in rollers, cpl., right**


Protective rollers for beginning or end of roller conveyor

**Lead-in rollers, cmpl., left**


Protective rollers for beginning or end of roller conveyor

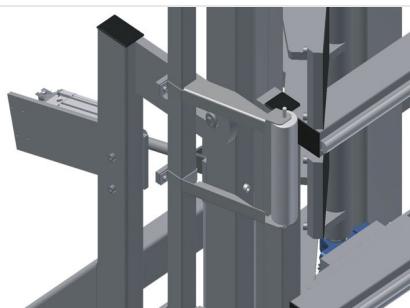**Tilt adjustment of 0° - 8°**

Pneumatic tilt adjustment of 0° - 8°

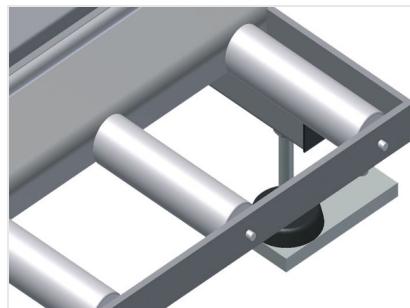**Profile protectors**

Profile protectors for support rollers 200 (Alum./21 x). Support rollers covered with protective tubing for aluminium elements.

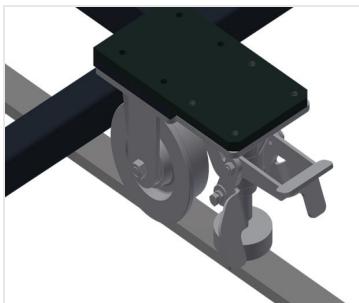**Mobility unit**

Mobility unit for KT/KTH/MS/VE. Mobility unit with flanged rollers and fixing brake

**Rails**

Rails, 2.0 m, left and right



elumatec AG  
Pinacher Straße, 61  
75417 Mühlacker  
Germany

Tel +49 7041-14-184  
sales@elumatec.com  
www.elumatec.com

The right to make technical alterations is reserved.

**VE 3000 / INSPECTION AND GLAZING UNIT**

- Length 4,410 mm
- Width 1,180 mm
- Height 2,600 mm
- Max. clamping width 3,000 mm
- Min. clamping width 400 mm
- Height adjustment 500 mm
- Clamping bar height 2,300 mm
- Clamping bar width 120 mm
- Lower roller conveyor width 200 mm
- Weight 470 kg
- Load 200 kg
- Compressed air supply 7 bar
- Air consumption 35 l/min.