



VR4003 F

Vertical roller conveyors



Vertical roller conveyor for transportation of window elements


- Stable steel construction
- Vertical roller conveyor for smooth transportation to the next work task as well as for transportation to storage and sorting of the finished windows
- Easy handling of window elements
- Every roller conveyor unit is 4,000 mm long
- Plastic slide bars top and bottom
- Three mini-roller conveyors with rubber rollers, diameter 50 mm
- Basic unit with end rack
- Vertical roller conveyor on rails with flanged rollers, mobile

• **Options**

- Rail, 2.0 m, left and right
- End stop for VR
- Lead-in roller for VR
- Profile protectors for support rollers (Alum.)



**Vertical roller conveyor
VR 4003 F**

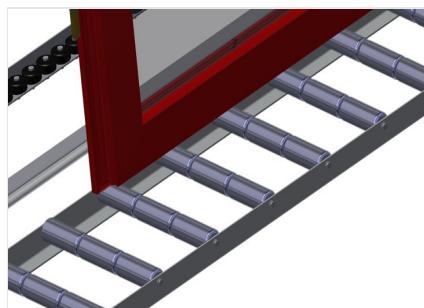


Support rollers

Rollers throughout, Roller conveyor divided into three parts, 3x 120 mm. Roller conveyor units, 2,000 mm, 3,000 mm and 4,000 mm long




Mini-roller conveyor

Three mini-roller conveyors with rubber rollers, diameter 50 mm

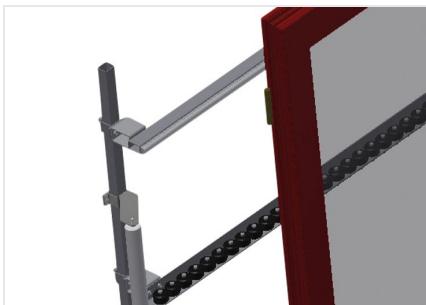


Back support

Rear back support with plastic slide bars, top and bottom

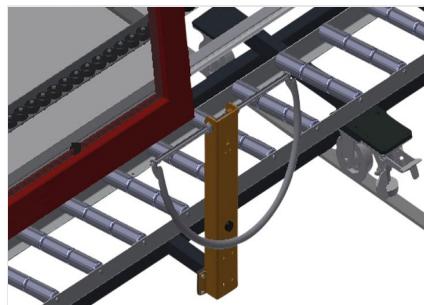


Grip

Grip makes pushing the roller conveyor on the rails easy

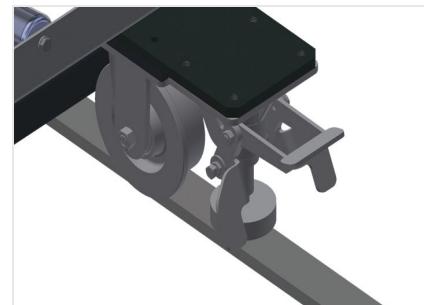

Mobility unit


Mobility unit with flanged rollers and fixing brake

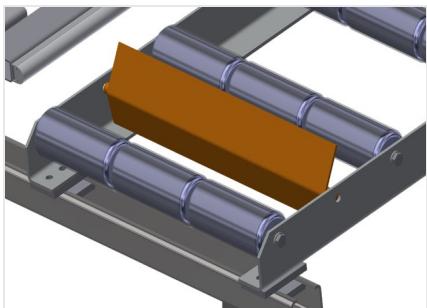**End stop**

End stop Rb = 3x 120 mm

**Lead-in rollers**

Protective rollers for beginning or end of roller conveyor L = 500 mm (pair) L = 250 mm (pair)

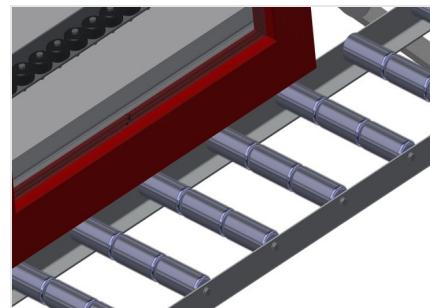**Profile protectors**

Profile protectors for support rollers 3x 120 mm (Alum./33 x and Alum./48 x). Support rollers covered with protective tubing

**Additional mini-roller conveyors**

Additional mini-roller conveyors with rubber rollers top/bottom

**Rails**

Rails, 2.0 m, left and right



elumatec AG
Pinacher Straße, 61
75417 Mühlacker
Germany

Tel +49 7041-14-184
sales@elumatec.com
www.elumatec.com

The right to make technical alterations is reserved.

VR 4003 F / VERTICAL ROLLER CONVEYORS

- Length 4,000 mm
- Width 1,000 mm
- Height 2,490 mm
- Support rollers divided into three parts 3 x 120 mm
- Unit height 2,100 mm
- Load 200 kg
- Weight 200 kg

elumatec AG
Pinacher Straße, 61
75417 Mühlacker
Germany

Tel +49 7041-14-184
sales@elumatec.com
www.elumatec.com

The right to make technical alterations is reserved.