




### HD3000

#### LIFT AND TURN TABLES

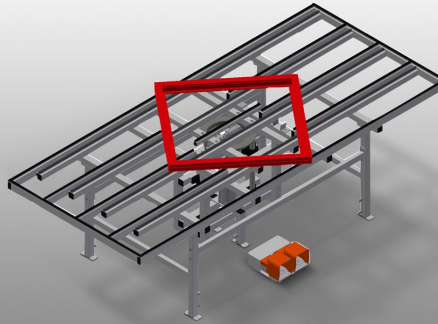


Lift and turn table for assembly and gasket insertion


- Stable steel construction
- Ideal for assembly and gasket insertion
- Adjustable height
- Inner table height pneumatically adjustable
- Inner table can be rotated; with pneumatic fixing brake
- Inner table equipped with rubber strips
- Outer table with plastic slide bars
- 4-fold compressed air supply

#### Option

- Outer table also available with rubber profiles on request (for aluminium profiles)




### Lift and turn table HD 3000

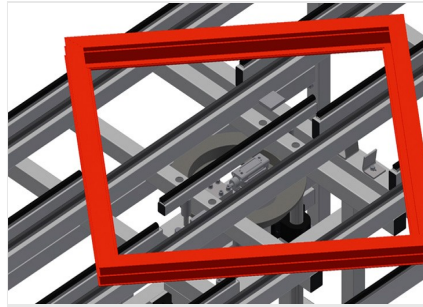


### Lift and turn mechanism

Practical for hardware assembly as well as for final assembly and gasket insertion. Inner table height pneumatically adjustable. Inner table can be rotated; with pneumatic fixing brake



### Foot switch

Control via foot valve

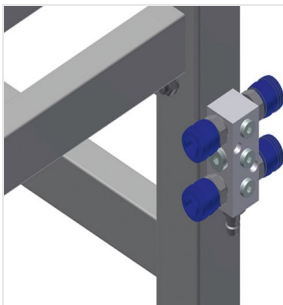


### 4-fold compressed air connection

4-fold compressed air connection for connecting compressed-air tools



### Outer table with rubber strips

Outer table rubber-knob profile for HD 3000. Outer table also available with rubber strips on request.

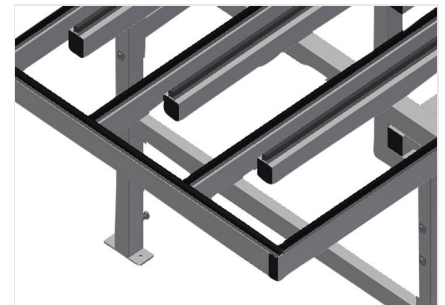

### Supporting surfaces

Outer table with plastic slide bars. Inner table equipped with rubber strips.





### HD 3000 / LIFT AND TURN TABLES

---

- Length 3,000 mm
- Weight 240 kg
- Width 1,300 mm
- Load 200 kg
- Adjustable height 850 - 1,000 mm
- Compressed air supply 7 bar
- Travel of pneum. inner table 150 mm
- Air consumption approx. 35 l/min.