

## KTH3000

### Tilting tables



Assembly table for vertical and horizontal assembly


- Stable steel construction
- Important when switching from vertical to horizontal transportation and vice versa
- Ideal for vertical and horizontal assembly
- Infinitely variable intermediate positions for ergonomic working
- Pneumatic tilting
- Pneumatic vertical height adjustment
- Table supporting surface with plastic slide bars
- Roller support can be lowered pneumatically
- Two lateral pneumatic clamps, (lowerable)
- 4-fold compressed air supply

#### Options

- Also available with brush strips on request
- Also available with felt strips on request (for wooden profiles)
- Also available with rubber strips on request (for aluminium profiles)
- Pull-out table supporting surface at top for KT/KTH 3000
- Profile protectors for support rollers
- Additional clamps for KT/KTH 3000
- Mobility unit for KT/KTH/MS
- Rail, 2.0 m




**Tilting table with height adjustment KTH 3000**

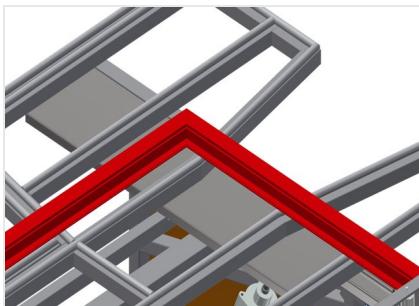


**Supporting surfaces**

Supporting surfaces with plastic slide bars

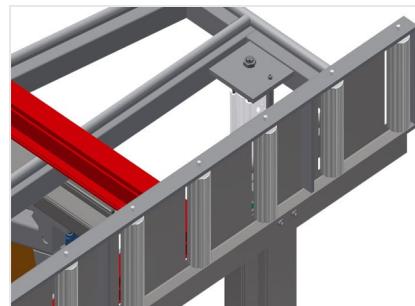


**Roller support**

Roller conveyor can be lowered pneumatically to allow unhindered working in horizontal position; in vertical position, trouble-free onward transport is possible

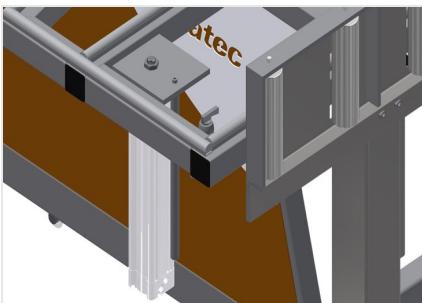


**Clamps**

Two clamps at the side for fixing the window element in place. Laterally adjustable with hand lever valve. Max. profile clamping height 150 mm




**Foot switch**

Control via foot valve, Pneumatic horizontal/vertical tilting; height adjustable pneumatically by 500 mm in the vertical position




**4-fold compressed air connection**


4-fold compressed air connection for connecting compressed-air tools

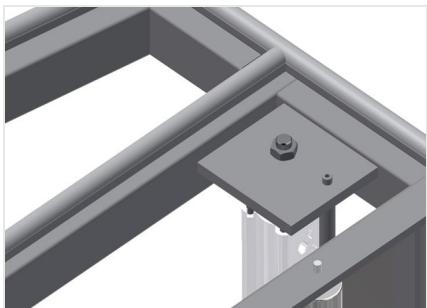**Auxiliary clamps**


Auxiliary clamps for KTH 3000 and KTH 4000. Auxiliary clamps provide extra security when working

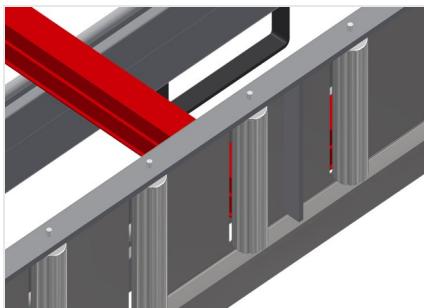**Profile protectors for support rollers**

Profile protectors for support rollers 200 mm (Alum./16 x and Alum./21 x). Roller conveyor with protective tubing over the rollers to protect the window element during infeed and outfeed

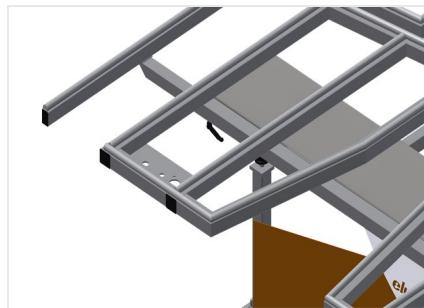**Pull-out profile support**


Pull-out table support at top for KTH 3000 and KTH 4000. The table support can be pulled out 500 mm at the top for high frames

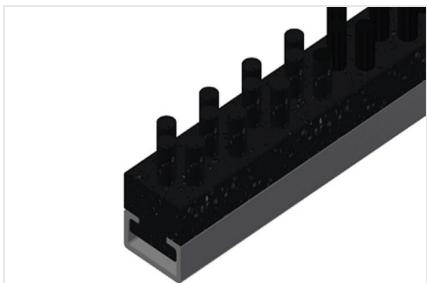**Brush strip**

Supporting surfaces with brush strip


**Felt strip**

Supporting surfaces with felt profile strip

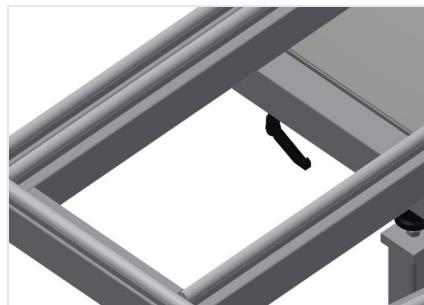**Rubber strips**

Supporting surfaces with rubber-knob profile

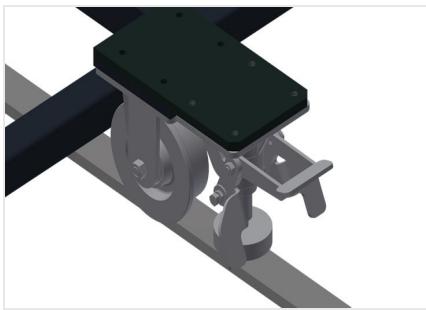

**Mobility unit**

Mobility unit for KT/KTH/MS/VE. Mobility unit with flanged rollers and fixing brake

**Rails**

Rails, 2.0 m, left and right

## KTH 3000 / TILTING TABLES

- Length 3,000 mm
- Width 1,820 mm
- Vertical height 1,900 mm
- Pneum. height adjustment 500 mm
- Roller conveyor width 200 mm
- Weight 330 kg
- Load 200 kg
- Compressed air supply 7 bar
- Air consumption approx. 35 l/min.