



KW2

Commissioning trolleys



Commissioning trolley for in-house and truck transportation of window elements

- Stable steel construction
- Trolley for in-house and external transportation
- Openings for forklift transportation
- Four loops for crane transportation
- Four lashing strap attachment points
- Profile supports with rubber surface
- Castors can be removed for increased stability of the commissioning trolley in a lorry
- Four castors, two of which have a fixing brake



**Commissioning trolley
KW 2**




Casters

Four casters, two of which have a fixing brake, provide a high degree of mobility and easy, safe handling



Removable casters

Casters can be removed for increased stability of the commissioning trolley in a lorry

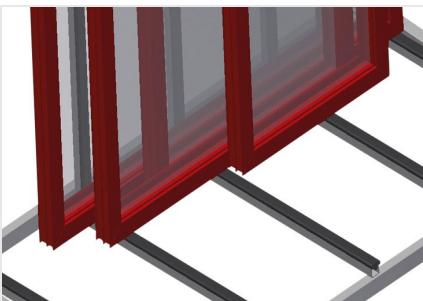

**Supports with rubber
strip**

Supporting surfaces equipped with rubber strips to protect profiles from damage



**Forklift openings and
lashing strap attachment
points**

Equipped with four forklift openings and four lashing strap attachment points



Crane attachment points

Equipped with four crane attachment points

KW 2 / COMMISSIONING TROLLEYS

- Length 2,025 mm
- Width 1,090 mm
- Height 1,880 mm
- Unit height 1,500 mm
- Effective width 800 mm
- Weight 130 kg
- Load 600 kg
- Roller diameter 125 mm

elumatec AG
Pinacher Straße, 61
75417 Mühlacker
Germany

Tel +49 7041-14-184
sales@elumatec.com
www.elumatec.com

The right to make technical alterations is reserved.