



KW4

Commissioning trolleys



Commissioning trolley for in-house transportation of window elements

- Stable steel construction
- Trolley for in-house transportation
- Openings for forklift transportation
- Four loops for crane transportation
- Four lashing strap attachment points
- Profile supports with rubber surface
- Castors can be removed for increased stability of the commissioning trolley
- Four castors, two of which have a fixing brake




**Commissioning trolley
KW 4**




Casters

Four casters, two of which have a fixing brake, provide a high degree of mobility and easy, safe handling



Removable casters

Casters can be removed for increased stability of the commissioning trolley on the floor

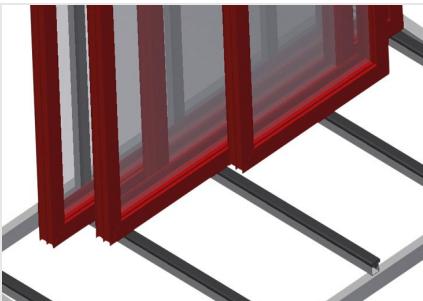


**Supports with rubber
strip**

Supporting surfaces equipped with rubber strips to protect profiles from damage




**Lashing strap attachment
points**

With four lashing strap attachment points

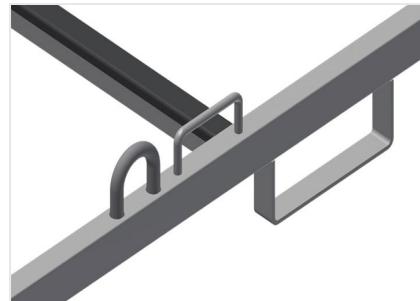

**Forklift openings and
crane attachment points**

Equipped with four forklift openings and four crane attachment points

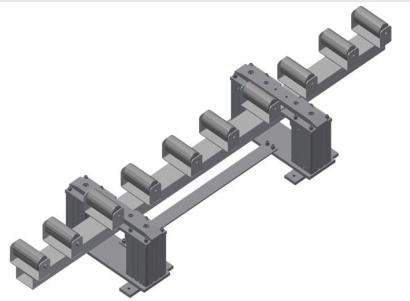

Lifting station

HBR 1600 Lifting station for the transfer of heavy windows to the transport trolley KW 4

KW 4 / COMMISSIONING TROLLEYS

- Length 2,000 mm
- Width 1,000 mm
- Height 1,850 mm
- Weight 150 kg
- Load 500 kg
- Roller diameter 125 mm

elumatec AG
Pinacher Straße, 61
75417 Mühlacker
Germany

Tel +49 7041-14-184
sales@elumatec.com
www.elumatec.com

The right to make technical alterations is reserved.