

## MS3000

### Assembly stands

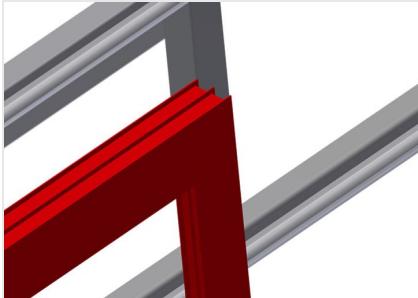


#### Assembly table for vertical assembly

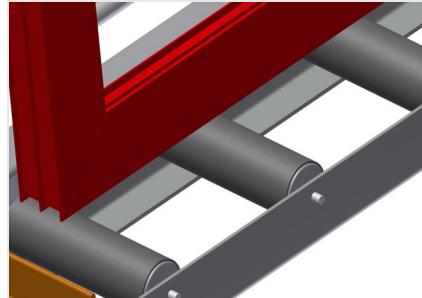
- Stable steel construction
- Ideal for vertical assembly
- Suitable for lines
- Infinitely variable intermediate positions for ergonomic working
- Height adjustment by means of pneumatic cylinder
- Roller support with steel rollers
- Table supporting surface with plastic slide bars
- Two horizontally adjustable profile clamps
- 4-fold compressed air supply

#### Options

- Pull-out profile support for MS 3000
- Positionable profile clamps
- Holder plate for screw driving unit
- Mobility unit
- Rail
- End stop
- Profile protectors for support rollers

**Assembly stand MS 3000****Supporting surfaces**

Supporting surfaces with plastic slide bars

**Roller support**

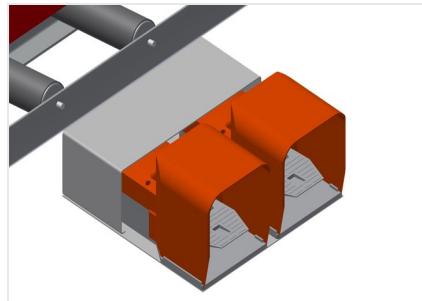
Lower roller conveyor with support roller, L = 200 mm

**Clamps**

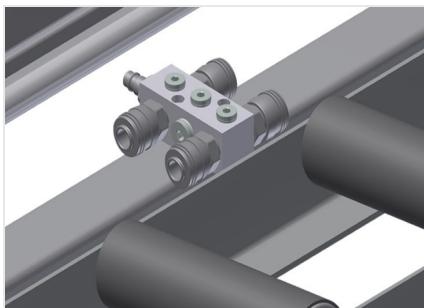
Two material clamps at the side fix the profile while working, profile clamping height, max. 200 mm

**Height adjustment**

Adjustable height; working height can be set by means of adjustable feet

**Foot switch**

Control via foot valve. Height adjustable pneumatically by 500 mm in the vertical position, clamping is pneumatic

**4-fold compressed air connection**

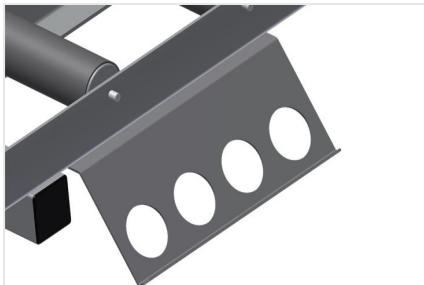
4-fold connection for compressed-air tools

**Lead-in rollers**

Protective rollers for beginning or end of roller conveyor

**Pull-out profile support**

The table support can be pulled out at the top for MS 3000 and MS 4000 by 800 mm and 500 mm to accommodate high frames

**Holder plate for screw driving unit**

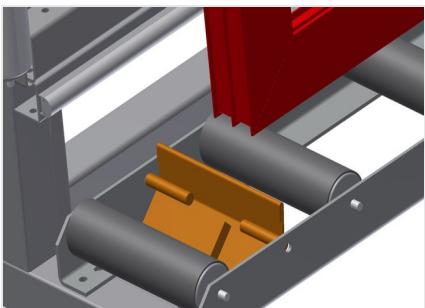
Tool rack for pneumatic tools

**Positionable profile clamps**

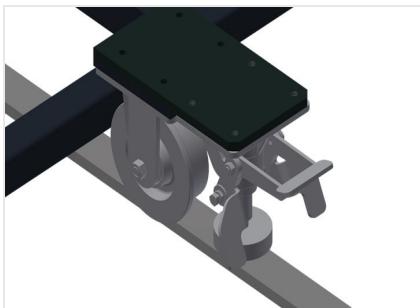
Auxiliary clamps provide extra security when working

**Profile protectors for support rollers**

Profile protectors for support rollers, 200 mm (Alum./16 x and Alum./21 x), roller conveyor with protective tubing over the rollers to protect the window element during infeed and outfeed.

**End stop**

End stop Rb = 200 mm

**Mobility unit**

Mobility unit for KT/KTH/MS/VE. Mobility unit with flanged rollers and fixing brake

**Rails**

Rails, 2.0 m, left and right

**MS 3000 / ASSEMBLY STANDS**

- Length 3,110 mm
- Width 1,200 mm
- Vertical height 2,050 mm
- Pneum. height adjustment 500 mm
- Roller conveyor width 200 mm
- Weight 330 kg
- Load 300 kg
- Compressed air supply 7 bar
- Air consumption approx. 35 l/min.



elumatec AG  
Pinacher Straße, 61  
75417 Mühlacker  
Germany

Tel +49 7041-14-184  
[sales@elumatec.com](mailto:sales@elumatec.com)  
[www.elumatec.com](http://www.elumatec.com)

The right to make technical alterations is reserved.