


17/09/2025

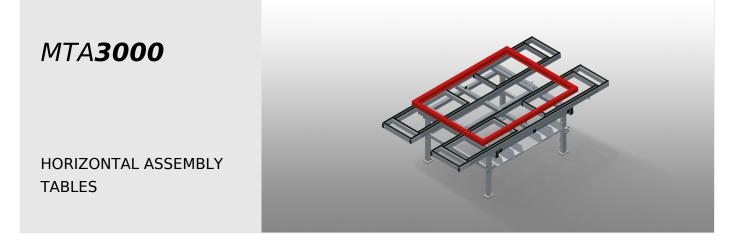

Assembly table expandable for all work tasks on frames and sashes

- Stable steel construction
- Universal assembly table
- Pull-outs on four sides
- Ideal for large elements
- Adjustable height
- Table supporting surface with plastic slide bars
- Practical storage area under the table surface
- Four PVC containers for small accessories, hardware and screws
- 4-fold compressed air supply
- Simple installation with a modular system design

Options


- Also available with brush strips on request
- Also available with felt strips on request (for wooden profiles)
- Also available with rubber strips on request (for aluminium profiles)
- Castors, cmpl.




elumatec AG Pinacher Straße, 61 75417 Mühlacker Germany Tel +49 7041-14-184 sales@elumatec.com www.elumatec.com

elumatec

Assembly table MTA 3000




Supporting surfaces Supporting surfaces with plastic slide bars



TECHNICAL SHEET

Storage area Practical storage area under the table surface with 4 PVC containers for small accessories, hardware and screws



4-fold compressed air connection

4-fold compressed air connection for connecting compressed-air tools



Height adjustment Adjustable height; working height can be set to 850 - 1,000 mm by means of adjustable feet



Brush strip Supporting surfaces with brush strip



elumatec AG Pinacher Straße, 61 75417 Mühlacker Germany Tel +49 7041-14-184 sales@elumatec.com www.elumatec.com

elumatec

TECHNICAL SHEET

17/09/2025



Felt strip Supporting surfaces with felt strip



Rubber strips Supporting surfaces with rubber-knob profile



Casters, cmpl. Two casters with brake and two fixed rollers provide mobility in all directions



elumatec AG Pinacher Straße, 61 75417 Mühlacker Germany Tel +49 7041-14-184 sales@elumatec.com www.elumatec.com



MTA 3000 / HORIZONTAL ASSEMBLY TABLES



- Length 2,400 4,000 mm
- Width 1,300 1,900 mm
- Height 850 1,000 mm
- Weight 160 kg



elumatec AG Pinacher Straße, 61 75417 Mühlacker Germany Tel +49 7041-14-184 sales@elumatec.com www.elumatec.com