


05/12/2025

## VR**4000 DF**

Vertical roller conveyors

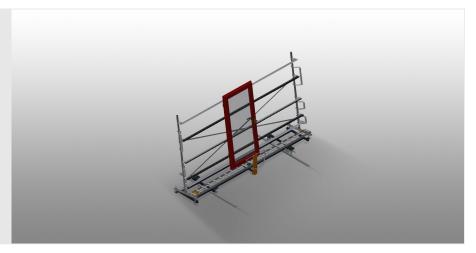

- Stable steel construction
- Vertical roller conveyor for smooth transportation to the next work task as well as for transportation to storage and sorting of the finished windows
- Easy handling of window elements
- Every roller conveyor unit is 4,000 mm long
- Plastic slide bars top and bottom
- Three mini-roller conveyors with rubber rollers, diameter 50 mm
- Basic unit with end rack
- Vertical roller conveyor on rails with flanged rollers, mobile
- Roller conveyor can be rotated 360°

#### **Options**

- Rail, 2.0 m, left and right
- End stop for VR
- Lead-in roller for VR
- Profile protectors for support rollers (Alum.)

elumatec AG Pinacher Straße, 61 75417 Mühlacker Germany Tel +49 7041-14-184 sales@elumatec.com

The right to make technical alterations is reserved.


1




05/12/2025



Vertical roller conveyor with mobility and rotation mechanism VR 4000 DF



**Support rollers**Rollers throughout, support roller width, 200 mm.



**Mini-roller conveyor**Three mini-roller conveyors with rubber rollers, diameter 50 mm



Rear back support with plastic slide bars, top and bottom



Grip makes pushing the roller conveyor on the rails easy



**Mobility unit**Mobility unit with flanged rollers and fixing brake



Tel +49 7041-14-184 sales@elumatec.com www.elumatec.com The right to make technical alterations is reserved.



05/12/2025



**End stop** 

End stop Rb = 200 mm



#### **Lead-in rollers**

Protective rollers for beginning or end of roller conveyor L = 500 mm (pair) L = 250 mm (pair)



#### **Profile protectors**

Profile protectors for support rollers 200 mm (Alum./21 x). Support rollers covered with protective tubing



# Additional mini-roller conveyors

Additional mini-roller conveyors with rubber rollers top/bottom



#### **Rails**

Rails, 2.0 m, left and right.



elumatec AG Pinacher Straße, 61 75417 Mühlacker Germany Tel +49 7041-14-184 sales@elumatec.com www.elumatec.com The right to make technical alterations is reserved.



05/12/2025

#### VR 4000 DF / VERTICAL ROLLER CONVEYORS

- Length 4,000 mm
- Width 1,000 mm
- Height 2,490 mm
- Support roller width 200 mm
- Unit height 2,100 mm
- Load 200 kg
- Weight 220 kg